



**RIGHT FEED
(W/O VENT OPTION)**

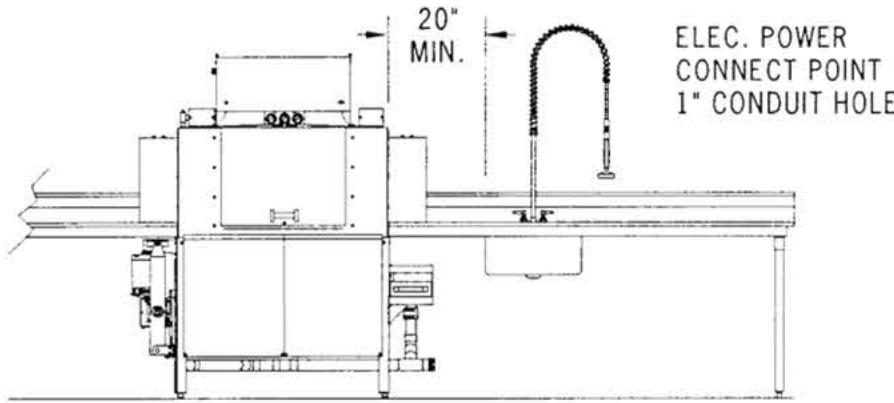

TOP VIEW OF LEFT FEED

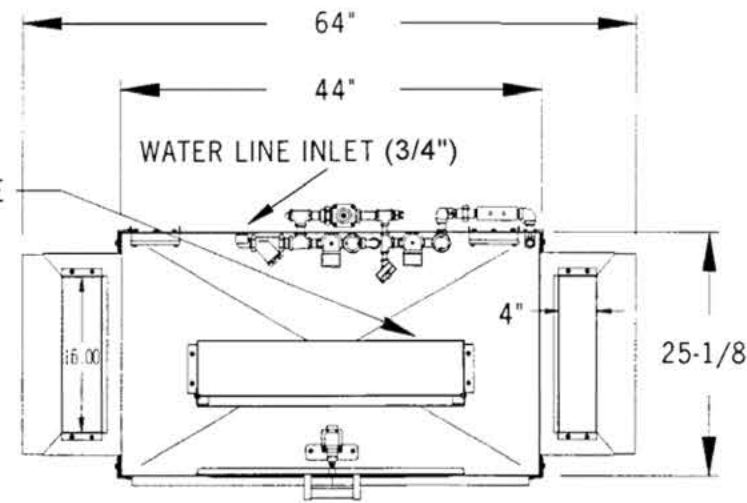

IMPORTANT NOTES

Both clean and soiled tables are to be bolted to the dishmachine with the 1/4-20x1/2" bolts and nuts provided.

Leaks cause potential problems in electrical and mechanical areas under the machine.



Quick drains (table scuppers) are not compatible with stage type conveyor dishmachines.

Scrap sinks shall be no closer than 20" minimum from the dishmachine end of table.

The clean exit table should be at least 72" straight for efficient conveyor operation.

Electrical and plumbing connects must be made by a qualified service person who will comply with all appropriate state and local health, electrical, plumbing, and safety codes.

* Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

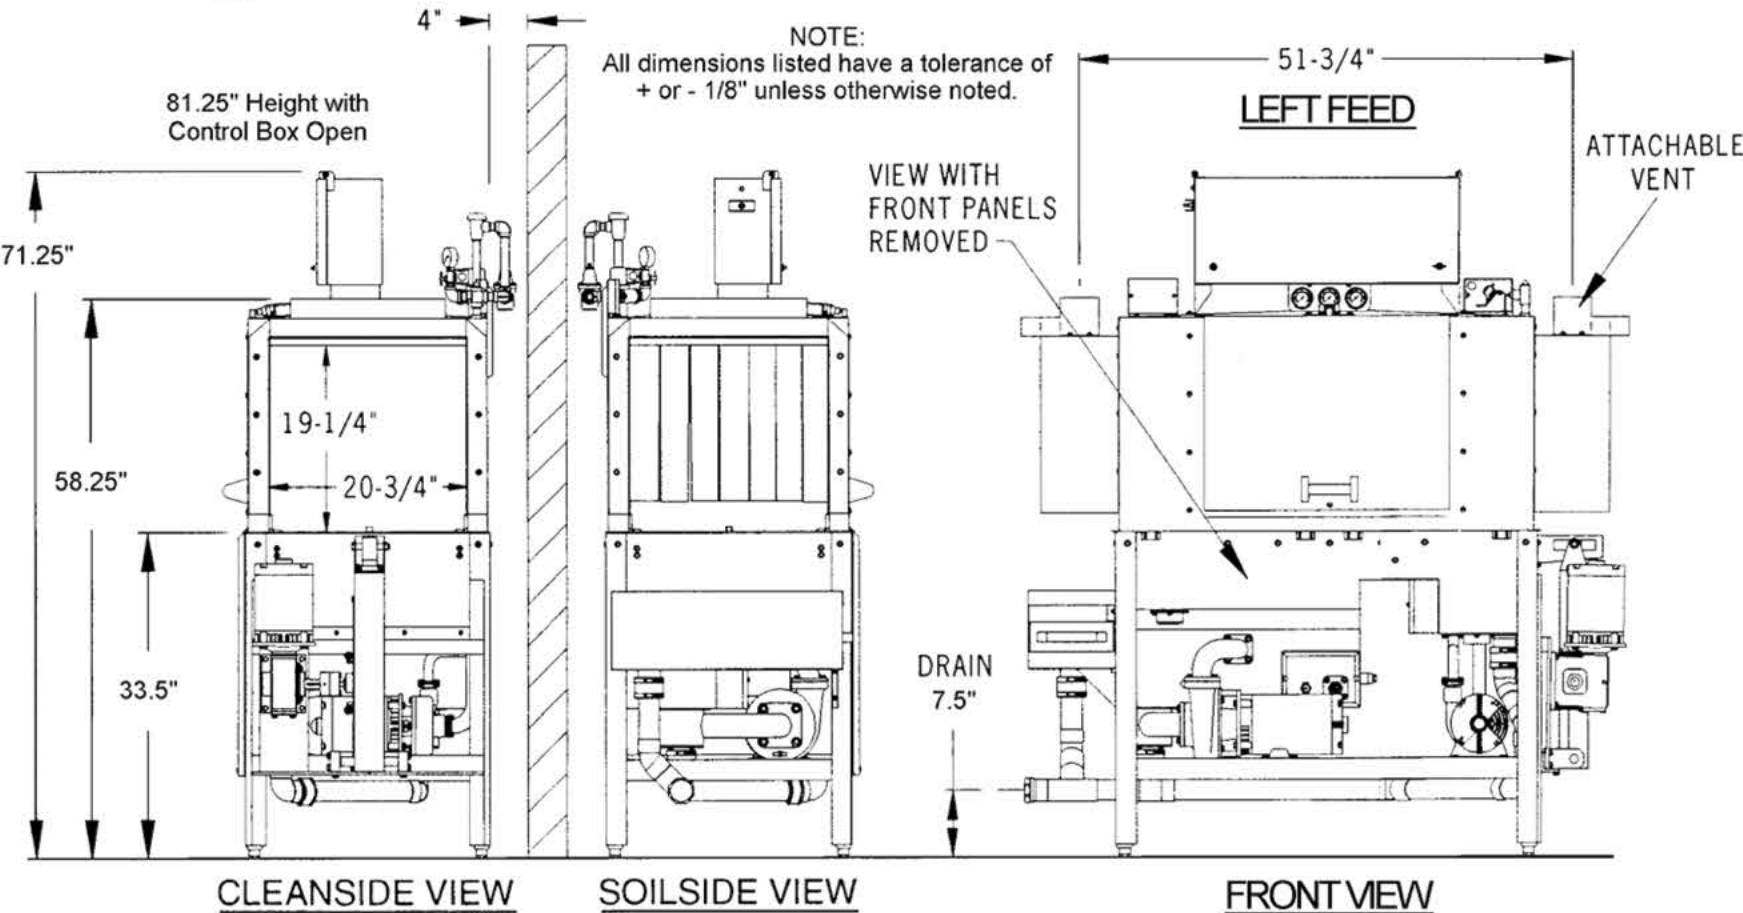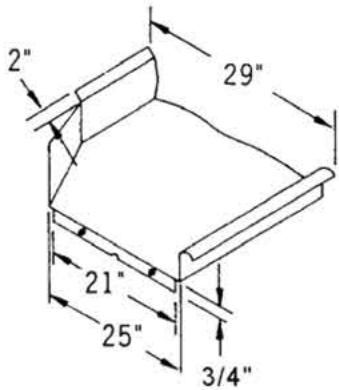

A System of Service.



www.TERMAC.com
1.800.332.4912

Model ADC-44 Specifications

ADC-44

NSF RATED CAPACITY
CONVEYOR SPEED

WATER CONSUMPTION

TOTAL GAL. PER HR.

FINAL RINSE TEMP (20 psi)

SANITIZER

ELECTRICAL POWER SUPPLY . . . 208/240V, 3PH, 60 AMP, 60 HZ

3 Phase installation requires 6 gauge wires, a suitable ground, and a clean circuit.

1 PH, 50/60 AMP, 60 HZ

1 Phase installation requires one(1) 50 Amp service using 8 gauge wires with a 10 gauge neutral wire, and one(1) 60 Amp service using 6 gauge wires and a suitable ground, both on clean circuits.

MOTOR RATINGS 3HP WASH, 1/3HP RINSE
1/3HP CONVEYOR

HEATER RATINGS 12KW WASH, 2.25KW RINSE

RACK SIZE STANDARD 19.75" x 19.75"
or 50.2 x 50.2 cm

ACCESS DOOR CLEARANCE 15" x 24.5"
38.1 x 62.2 cm

RACK CLEARANCE (Through machine) 19.25" x 20.75"
48.9 x 52.7 cm

WATER INLET (3/4") F.P.T.

DRAIN SIZE (2") F.P.T.

HEIGHT (with door open) 73.75"
(81.25" or 206.3 cm with control box cover open)

WIDTH (Overall) 64"
162.5 cm

WIDTH, TABLE TO TABLE 44"
111.7 cm

DEPTH 30"
76.2 cm

SHIPPING WEIGHT 760 POUNDS
344.7 kg

SHIPPING VOLUME (CRATED) 117 CU. FT.
3.31 cu meters